

DESCRIPTION

The 500H-6x6 is an ideal system for measuring large aperture antennas with medium to high gain (>15 dBi) making it suitable for testing larger arrays or reflector antennas that require a zenith orientation for testing. The 500H-6x6 is based on an "H" frame design and is constructed using two reinforced steel X rails that support a stiff yet light weight Y-bridge on precision bearing rails. The high capacity probe stage can accommodate various probes from L to mmWave bands including any necessary RF equipment, probe extensions and optional roll and Z stages.


CAPABILITIES

The system interfaces with a wide variety of RF equipment and is capable of measuring amplitude and phase patterns from L-band to mmWave bands. The system includes NSI Antenna Measurement Software. The system software runs on a Windows based measurement workstation and provides automatic setup of scans based on measurement parameters and desired output. Measured data can be processed for far-field or holographic patterns yielding complete characterization of the antenna's beam pointing and cross polarization. The model 500H-6x6 can be supplied with a variety of options including an AUT laser alignment

FEATURES

- High Accuracy - Uncorrected Planarity < 0.002" (0.050 mm) RMS
- 6' x 6' (1.8 m x 1.8 m) Scan Area
- Precision Rack and Pinion Drive
- L-band to mmWave Band Measurements
- Far-field, Near-field, and Holographic Patterns
- Space and Radar Applications

SPECIFICATIONS	
Construction	Steel X beams supporting steel Y bridge
Drive system	Precision Synchronized Stepper Motors
Scan Area	6' x 6' (1.8 m x 1.8 m)
Planarity	< 0.002" (0.050 mm) RMS
Corrected Planarity (Requires optional Structure Correction Software and Probe Translation Stage)	< 0.001" (0.025 mm) RMS
Resolution	0.001" (0.025 mm) (X) 0.002" (0.050 mm) (Y)
Position Repeatability	0.002" (0.050 mm) RMS
Scan Speed	10 in/s (0.25 m/s) (X) 20 in/s (0.50 m/s) (Y)
Probe Carriage Capacity	85 lb (38 kg)
System Controller	NSI controller with serial and parallel I/O interfaces
Measurement Workstation	Measurement workstation computer with large LCD monitor
Stepper Motor Power Amplifier	EIA 19" rack mount (7" H x 14" D)
Motor Cables	40' (12 m) with quick-connect terminations
Probe	WR90 Open-ended Waveguide Probe SMA (f) transition & Pyramidal absorber (3")
Scanner Absorber	X-Y absorber kit, 8" pyramidal under bridge, 5" wedge absorber on X rails
RF Cables	20 GHz RF Cables
Supported RF Devices	NSI Panther Receiver Subsystem or selection of Agilent, Rohde & Schwarz and Anritsu VNA's (contact NSI for a complete list)
Power	100-240 VAC switchable, 47-63 HZ, 800 watts

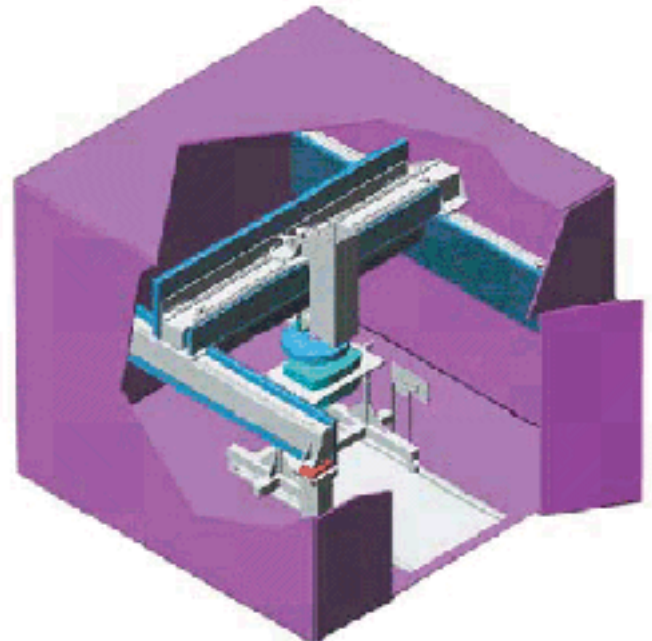

Shown is a 12' wide x 12' deep x 10' height chamber

DIMENSIONS

- ◆ Scanner Width - 11.6' (3.5m)
- ◆ Scanner Depth - 11.5' (3.5m)
- ◆ Scanner Height - Variable
- ◆ System Weight - 3,600 lbs (1620 kg)
- ◆ Room Width - 12' (3.7m)
- ◆ Room Depth - 12' (3.7m)
- ◆ Room Height - 10' (3.0m)

ORDERING INFORMATION

Please contact the NSI Sales department to order this product.

Nearfield Systems, Incorporated

19730 Magellan Drive, Torrance, CA 90502, USA, Tel: 310.525.7000, Fax: 310.525.7100
Email: sales@nearfield.com. Visit our website: www.nearfield.com